




## GENERAL ASSEMBLY:

Each GPT VCXT™ insulating set comprises the following components:

High Temperature Insulating Gasket 1 per flange. High Temperature Insulating Sleeves 1 per flange bolt. High Temperature Insulating Washers 2 per flange bolt. Metallic Backing Washers 2 per flange bolt.

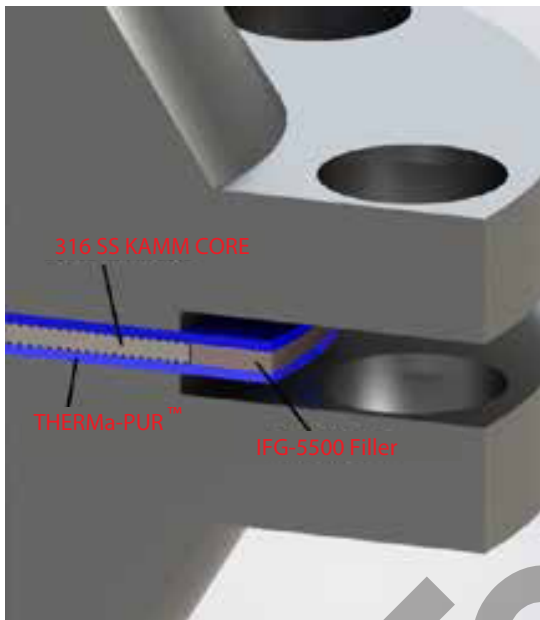

## IMPROVED ATTRIBUTES:

ATTRIBUTE	OLD VCXT™	NEW VCXT™
Temperature Rating	715°F (380°C)	770°F (410°C)
Blowout Rating	2,129 psi	4,147 psi
Steam Test (hrs. performance @ 407°F (208°C))	5,238	6,285
Electrical Test @ 5000V DC	24Mohm	35Gphms