

# Flexitallic®

**n novus™**  
a Flexitallic brand

## Data / Specification Sheet • Novus 30

**Novus 30** is a good quality compressed sheet material based on a blend of aramid and inorganic fibres with a nitrile rubber binder system.



### Service

Novus 30 is a general purpose material suitable for use in a wide range of applications, including hot and cold water, steam, oils, fuels, gases and a wide range of general chemicals.

### Approvals / Compliance

WRAS Potable Water:  
Registration No. 1510515

Complies with BS Specification 7531  
Grade Y

TA-LUFT (in accordance with VDI  
Guideline 2440)

GL Approval 37702 - 12HH

### Availability

Thickness range:  
0.4mm to 6.0mm

Standard sheet sizes:  
2.0m x 2.0m  
2.0m x 1.5m  
2.0m x 1.0m  
1.5m x 1.5m  
1.5m x 1.0m

Standard roll sizes:  
Up to a maximum size of 6.0m x 2.0m


Available with fine mesh mild steel  
reinforcement: Novus 30 Metallic or  
gauze mild steel wire reinforcement:  
Novus 30 GWI.

It can also be supplied with anti-stick  
coating and graphite coating.

### Physical properties

<b>Thickness</b>		1.5mm
<b>Density</b>		2.0g/cc
<b>Tensile Strength</b>	ASTM F152	12MPa
<b>Compression</b>	ASTM F36	9%
<b>Recovery</b>	ASTM F36	50% min
<b>Residual Stress</b>	BS 7531 (300°C)	23MPa
	DIN 52913	29MPa
<b>Gas Leakage</b>	BS 7531	<1.0cc/min
<b>ASTM Oil 1</b>	Thickness increase	2.0%
<b>IRM 903 Oil</b>	Thickness increase	5.0%
<b>ASTM Fuel B</b>	Thickness increase	4.0%

### Novus 30 Pressure/Temperature Limits

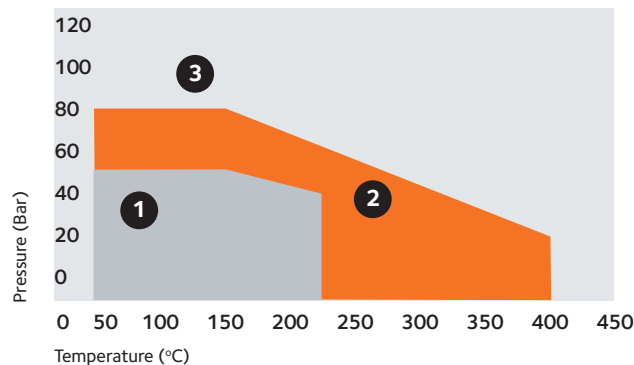

- 1 Suitable subject to chemical compatibility.
- 2 Suitable in some cases but check your application requirements with Flexitallic.
- 3 Contact the Technical Team for applications with higher temperatures and pressures. Applicable to 1.5mm and below.

The operating temperature of non-asbestos sheet material is related to the thickness of materials selected. Thinner materials give better temperature and pressure properties.

As the company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only, and without liability on the part of the company.